


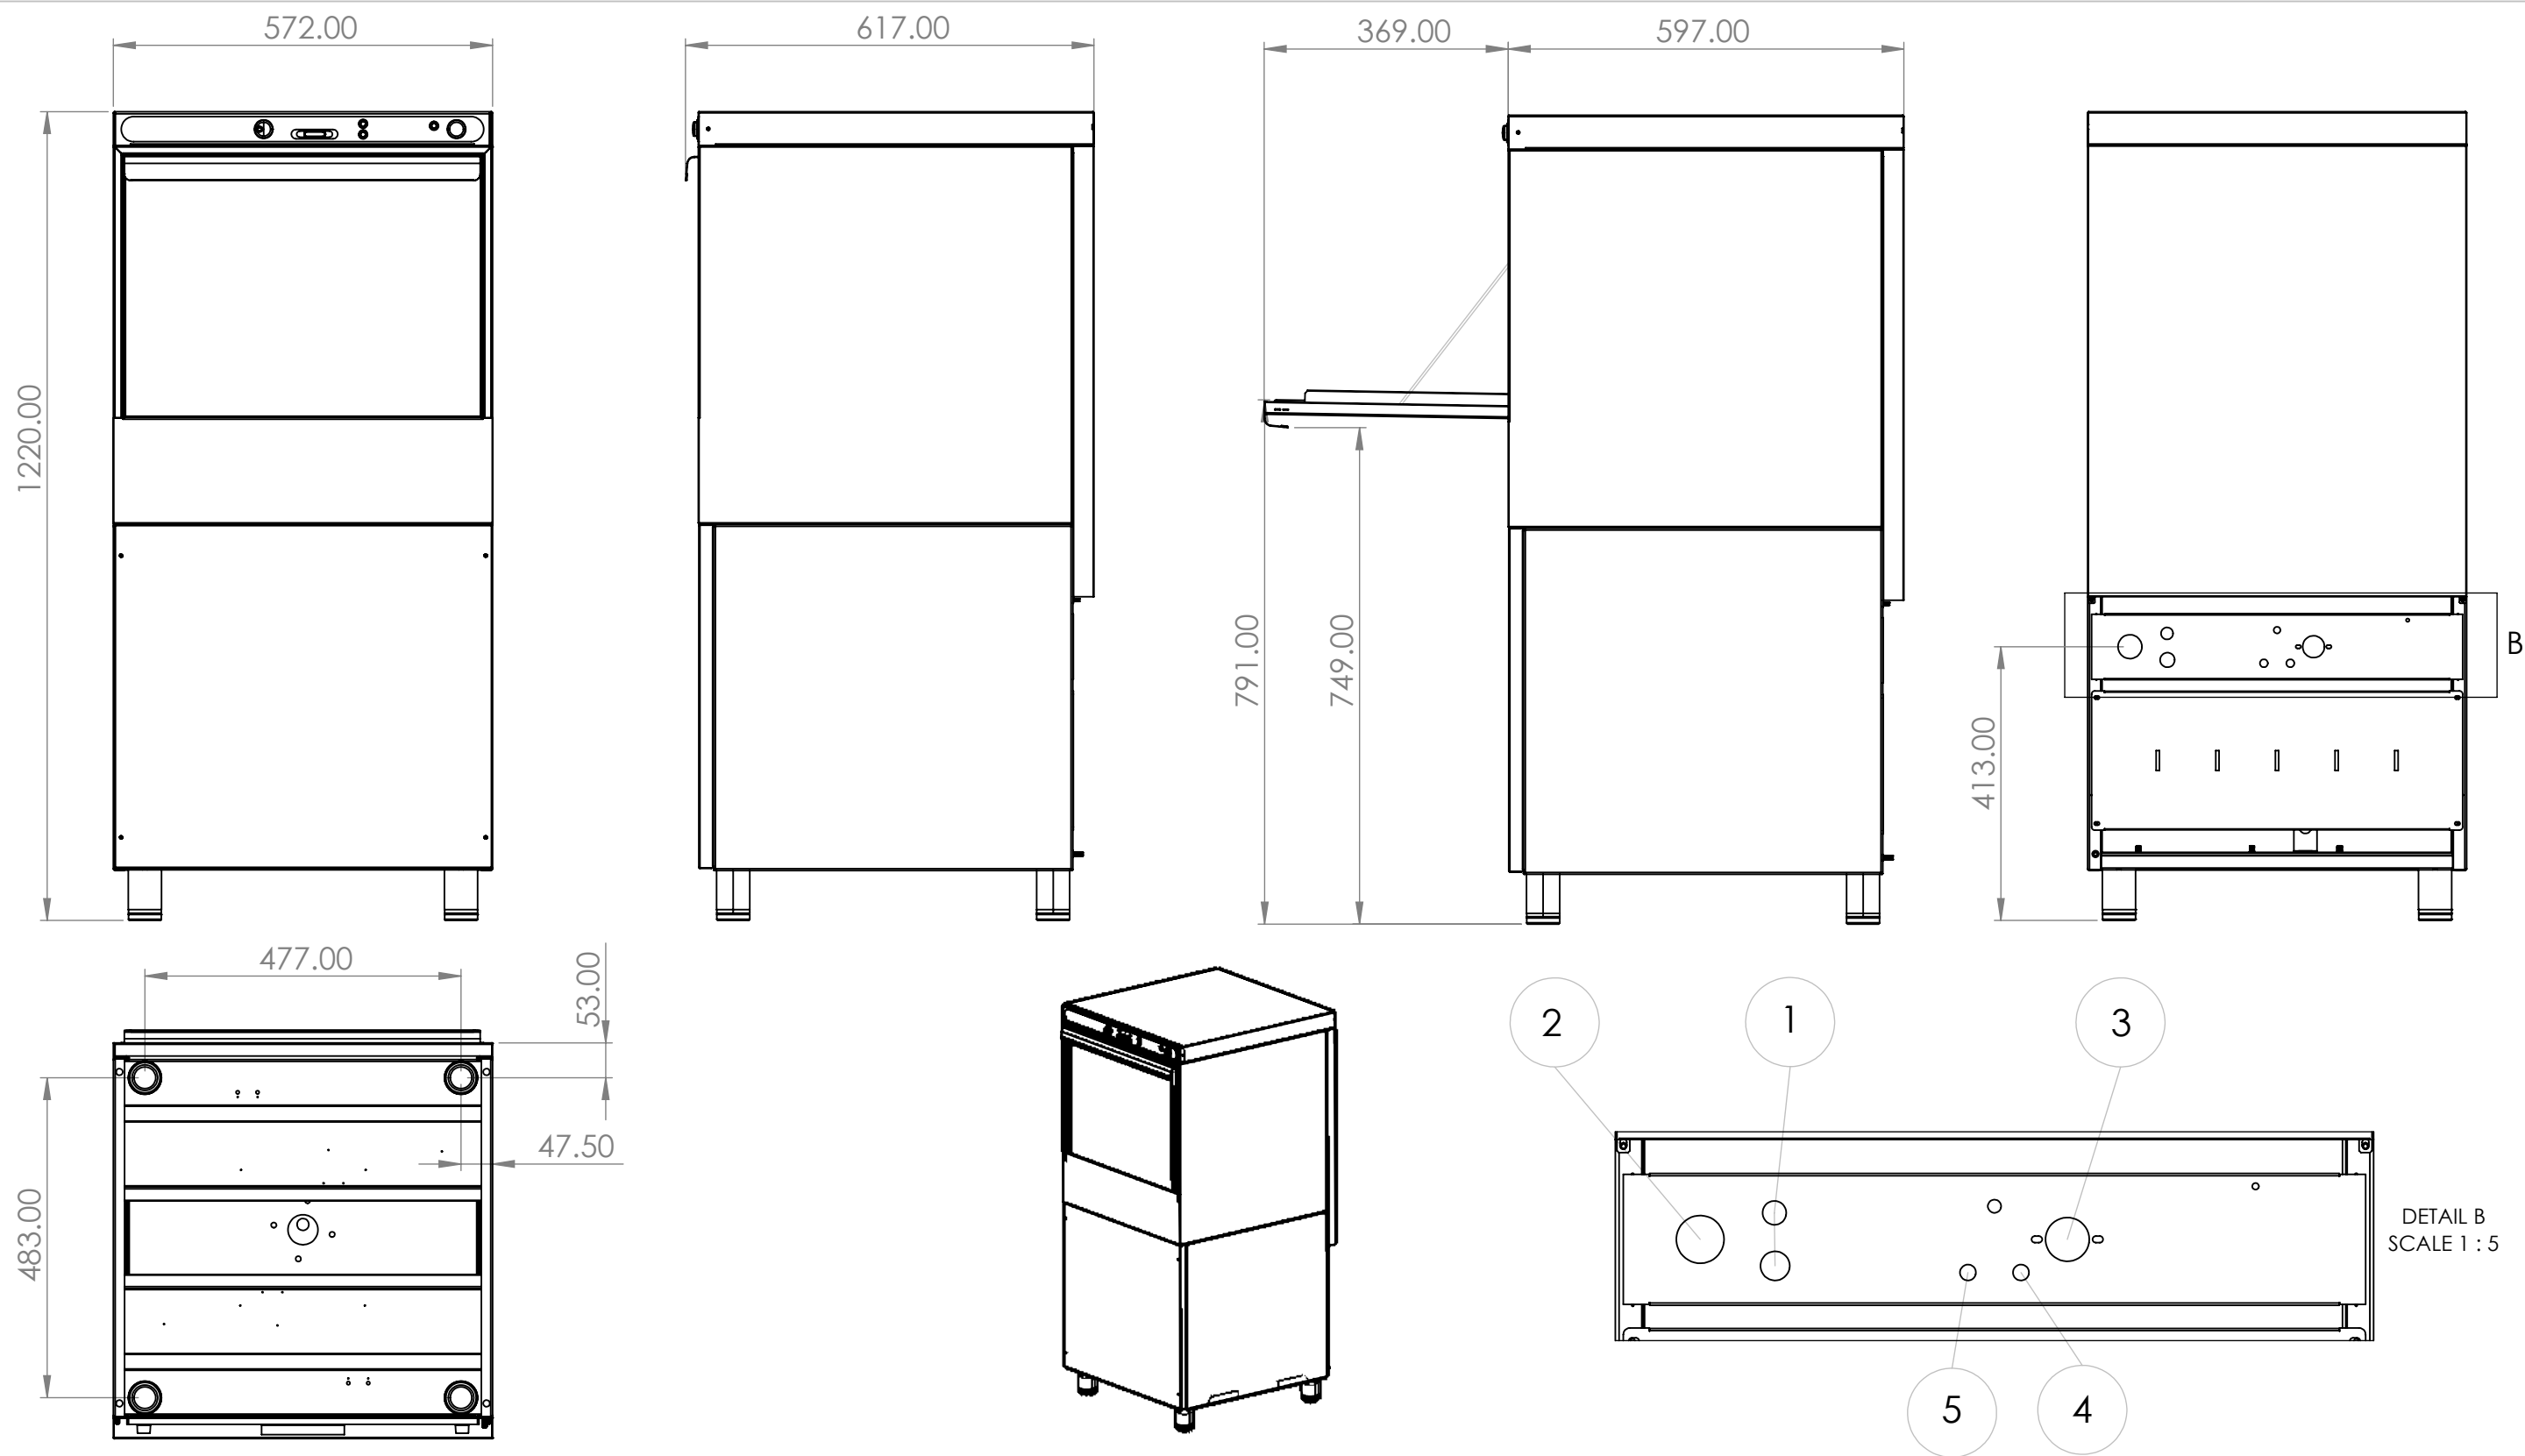

MACHINE PROPERTIES				BALLOON INFORMATION		ELVIOMEX
CAPACITY (Lt)		SINGLE PHASE (1-N)	VOLTAGE (V)	220-240V - 1N-50/60Hz	1. 220-240V - 1N-50/60Hz - Electrical Supply Connection (H05 VV-F 3x2.5mm Cable Length without plug :1.3m) 380-415V - 3N-50/60Hz - Electrical Supply Connection (H05 VV-F 5x2.5mm Cable Length without plug :1.3m)	INSTALLATION DRAWING MODEL KNOSSOS
BOILER	TANK		Max.Amp./Phase	15.4		
6	35		Max.Loading (Kw)	3.6		
WEIGHT (Kg)		THREE PHASE (3-N)	VOLTAGE (V)	380-415V - 3N-50/60Hz	3. Inlet Male Nozzle Threaded End G3/4" for water supply L:1.5m	R.1
NET	GROSS		Max.Amp./Phase	12.2		
55	60		Max.Loading (Kw)	6.6		
				4.	Rinse Aid Flexible Pipe Pos. (Blue) (Outer Diameter 6mm - L:1400mm)	
				5.	Detergent Flexible Pipe Pos. (Clear) (Outer Diameter 6mm - L:1400mm)	